




DESCRIPTION

- Energy Saving 5 Watt Intergrated LED
- Lasts 45 years* or 50,000 Hours Continuous Use
- Future Proof with push in wire connectors for each head
- 6 foot wire leads - can be adjusted to customers specific specification
- Stamped aluminum heat sink and injection mold PC lens
- Cut out size - 2 3/4"
- 5 Year Warranty

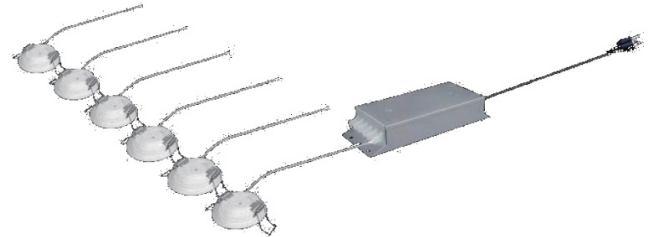

Part Number	Order Number	CCT ₃	CRI ₄	Typical Lumens ₂	Voltage	Wattage	Average Rated Life ₁	Light Efficacy	Beam Angle	Operating Frequency (Hz)
DL - 2.5in - 460LM - 8 - 35K - SV	53825131	3500k	80Ra	460lm(each 2.5in down light)	120V	5W	50,000 Hours	92lm/w	100	60Hz

1 Hours lifetime with 70% lumen maintenance
 2 Thermally stable typical lumens (±10%)
 3 Thermally stable CCT (±10%)
 4 Color rendering index/Ra



DESCRIPTION

- Isolated Driver (one Driver for six packs max.)

Order Number	Wattage	Input Voltage	Operating Frequency	Channel
90600733	30W	120V	60Hz	6-channel



DESCRIPTION

- Isolated Driver (one Driver for four packs max.)

Order Number	Wattage	Input Voltage	Operating Frequency	Channel
90600733	20W	120V	60Hz	6-channel

SHIPPING INFORMATION

Model	Part	UPC	Product Dimensions	Master Carton Bar Code	Master Carton Dimensions	Master Carton Weight
53825131	DL-2.5in-460LM-8-35K-SV	849489063270	φ3 x 0.87in. φ7.72 x 2.2cm.	50849489063275	24.57x18.19x4.17in. 62.4 x 46.2 x 10.6cm	11.26lbs

1 Hours lifetime with 70% lumen maintenance
 2 Thermally stable typical lumens (±10%)
 3 Thermally stable CCT (±10%)
 4 Color rendering index/Ra