



## 4' AND 2' HIGH OUTPUT STRIP LIGHT SERIES

The LEDS multi-volt LED Strip Lights offer exceptional performance as a high quality replacement for traditional fluorescent light sources. Lasting more than 5 times longer than fluorescent alternatives, these strip lights reduce energy and maintenance costs. Engineered to be installed as a direct wire fixture, an optional mounting plate is also available.


### 2' STRIP LIGHT FEATURES

- Installation flushmount direct wire
- 45 year life or 50,000 hour of continuous use
- UL Listed Damp Location
- Suitable for installations from -20°F to 95°F
- 5 - Year Warranty

### 4' STRIP LIGHT FEATURES

- Two-way installation: Flushmount & Suspended
- 10' Power Cord
- One pair 10' Aircraft Cable
- 45 year life or 50,000 hour of continuous use
- UL Listed Damp Location
- Suitable for installations from -20°F to 95°F
- 5 - Year Warranty

Part Number	Length	Width	Height
ST-2050-AM-MV	609 mm 23.97"	75 mm 2.95"	83 mm 3.26"
ST-4050-SM-MV	1220 mm 48.03"	75 mm 2.95"	83 mm 3.26"

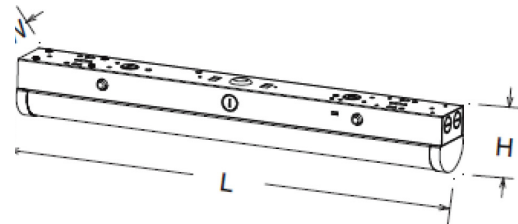

Order Code	Part Number	Watts	Lumens <sup>1</sup>	CCT <sup>2</sup>	Avg Life <sup>3</sup>	CRI <sup>4</sup>	Voltage
ST4050	ST-4050-AM-MV	40	5200	5000	50000	80	120-277
ST2050	ST-2050-SM-MV	20	2600	5000	50000	80	120-277

This device complies with Part 15 of the FCC Rules. Operation is subject to the following conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see [www.fcc.gov](http://www.fcc.gov)

1. Thermally stable typical lumens (+/- 10%)
2. Thermally stable CCT (+/- 10%)
3. Average life based on 70% lumen maintenance
4. Color rendering index/Ra