




LEDS T5 TUBE SERIES

The LEDS T5 Tubes are perfect for new construction, retrofit and lighting upgrade solutions. High output and top of the line specifications. Available in multiple wattage and lumen output

FEATURES


- High efficacy, long life LEDs
- High efficiency driver: 120V – 277V
- Glass construction for superior thermal management.
- 320 degree beam angle
- 5-Year warranty

T5 SINGLE END POWER

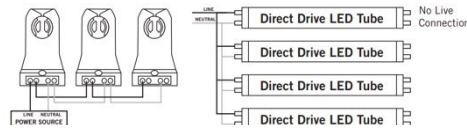

Use G5 Non-Shunted Sockets Wired to Line Voltage

Nominal Length	A (Illuminated Length)	B (Body Length)	C (Diameter)
48"	41.0"	45.8"	45.8"



Order Code	Part Number	Watts	Lumens	CCT	CRI	Voltage
T51111	T5-F4-2540-B	25	3800	4000	>80	120-277
T51112	T5-F4-2550-B	25	3800	5000	>80	120-277

APPLICATION NOTES:

1. Operating Temperature Range Between -20°C and +45°C (-4°F and +113°F)
2. Ballast Bypass Required.

Use G5 Non-Shunted Sockets Wired to Line Voltage.

WARRANTY: This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. LEDS, LLC does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. LEDS, LLC reserves the right to alter specifications without prior notice.