


LEDS T6 GLASS TUBE SERIES


The LED T6 Tubes are perfect for new construction, retro-fit and lighting upgrade solutions. High output and top of the line specifications. Available in multiple wattage and lumen output

FEATURES


- High efficacy, long life LEDs
- High efficiency external driver: 120 - 277V
- Glass construction for superior thermal management.
- 320° beam angle

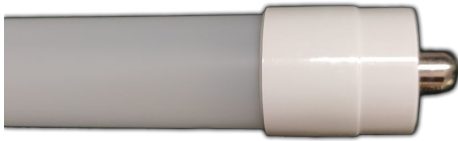

DRIVER SPECIFICATIONS

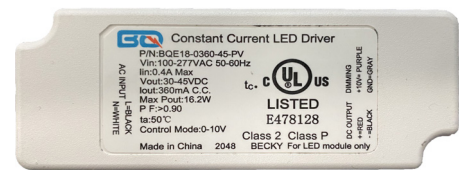

Order Code	Power Factor	Hz	Voltage
BQE18-0360-45-PV	>0.9	50-60	120-277

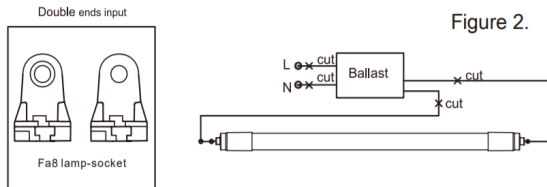

Wiring the driver as following figures, (Figure 2) the LED tube designed for double ends input.

Specification

Order Code	Size (feet)	Watts	CRI	Power Factor	Beam Angle	Lumens	CCT	Voltage
T61240	4	12	>80	>0.9	320	1600	4000K,5000K	120-277
T62040	5.3	20	>80	>0.9	320	2400	4000k,5000k	120-277

Product Packing Specification

Model Number	Quantity	Net Weight	Gross Weight	CTN Size
T61240	30pcs	10.6lbs	12.3lbs	106cm*21cm*18cm 41.7"*7.4"*7.2"
T62040	30pcs	10.6lbs	12.3lbs	106cm*21cm*18cm 41.7"*7.4"*7.2"

WARRANTY: This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. LEDS, LLC does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. LEDS, LLC reserves the right to alter specifications without prior notice.