


## LEDS T8 TUBE SERIES

The LEDS T8 Tubes are perfect for new construction, retrofit and lighting upgrade solutions. High output and top of the line specifications.




## FEATURES

- G13 Bi-Pin
- Shatter Resistant Glass Tube
- 5-Year warranty
- Single Power End
- Cool White 4000K CCT
- 45 year life or 50,000 hour of continuous use
- 5 Year Limited Warranty



Nominal Length	A (Body Length)	B (Diameter)
48"	47.6"	1.02"

## T8 SINGLE END POWER

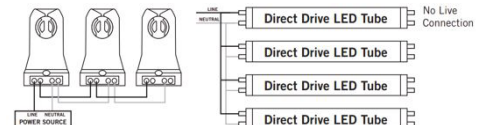

Use G13 Non-Shunted Sockets Wired to Line Voltage.

Order Code	Part Number	Watts	Lumens	CCT	CRI	Voltage
T8113	T8-F4-840-B2	8.5	1700	4000	80	120-277

## APPLICATION NOTES

1. Operating Temperature Range Between -20°C and +45°C (-4°F and +113°F)
2. Ballast Bypass Required.

Use G13 Non-Shunted Sockets Wired to Line Voltage.

**WARRANTY:** This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. LEDS, LLC does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. LEDS, LLC reserves the right to alter specifications without prior notice.