



DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

SINGLE-END T5 LED TUBES

KEY FEATURES

LEDS T5 Tubes are the ideal solution for new construction, retrofits, and lighting upgrades, delivering high output and superior performance. Designed with high-efficacy, long-life LEDs and a high-efficiency driver (120V-277V), these tubes ensure reliable and energy-efficient operation. Their glass construction provides excellent thermal management, while the 320° beam angle ensures broad, uniform illumination. Perfect for a wide range of applications, these T5 tubes offer exceptional quality and durability.

CCT & Light Quality

- 5000K, 80+ CRI

Light Output

- Light Output: 3800lm
- Efficacy Rating: up to 152 LPW
- Life time rating 50,000 hrs.

SPECIFICATIONS

Construction

- Glass construction for superior thermal management

Optics

- Beam angle: 320°

Electrical

- Operates at 120-277, 50/60Hz
- Power Factor: > 0.9 nominal | THD <20%
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

Warranty

5-Year Standard Warranty. See terms at: LEDS-LLC.com




Certifications & Test Data

- cULus Classified
- RoHS compliant with no lead or mercury
- DLC Standard Listed. Search qpl.designlights.org for details



T5 Single End Power

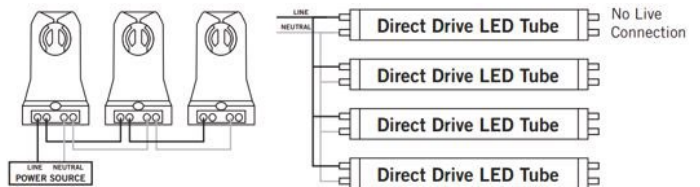


Use G5 Non-Shunted Sockets Wired to Line Voltage

STOCK ORDERING INFORMATION

Catalog Part Number	Order Code	Size	Lumen Package	Wattage	Efficacy	CCT	CRI	Voltage	DLC Listed*
T5-F4-2550-B	T51112	4 ft	3800lm	25W	152 LPW	5000K	80 (min)	120-277V	Standard

DIMENSIONS

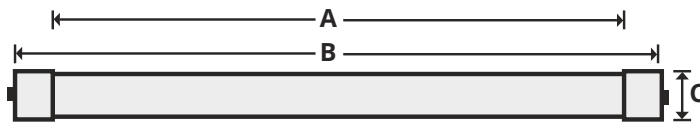

Nominal Length	A (Illuminated Length)	B (Body Length)	C (Diameter)
48 in	41.0 in	45.8 in	1.02 in



LEDS, LLC
email: orders@LEDS-LLC.com | LEDS-LLC.com

All specifications are subject to change without notice. All reported values are typical, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.