



T5 LED TUBES TYPE B G5 MINIATURE BI-PIN BASE

KEY FEATURES

LEDS T5 Tubes are the ideal solution for new construction, retrofits, and lighting upgrades, delivering high output and superior performance. Designed with high efficacy, long-life LEDs and a high-efficiency driver (120V-277V), these tubes ensure reliable and energy-efficient operation. Their glass construction provides excellent thermal management. Perfect for a wide range of applications, these T5 tubes offer exceptional quality and durability.

CCT & Light Quality

- 5000K, 80+ CRI

Light Output

- Light Output: 3500lm
- Efficacy Rating: up to 140 LPW
- Life time rating 50,000 hrs.

SPECIFICATIONS

Construction

- Glass construction for superior thermal management.
- High efficacy, long life LEDs
- G13 Miniature Bi-Pin Base


Electrical

- Operates at 120-277, 50/60Hz
- Power Factor: > 0.9 nominal | THD <20%
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

Warranty

5-Year Standard Warranty. See terms at: LEDS-LLC.com

| | |
|------------|----------|
| DATE: | PROJECT: |
| TYPE: | NOTES: |
| CATALOG #: | |

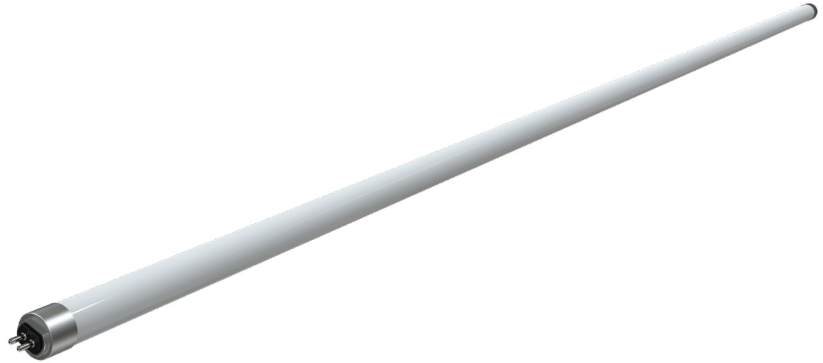

Certifications & Test Data

- cULus Classified
- RoHS compliant with no lead or mercury
- DLC Standard Listed. Search qpl.designlights.org for details



STOCK ORDERING INFORMATION

| Part Number | Order Code | Size | Lumen Package | Wattage | Efficacy | CCT | CRI | Voltage | DLC Listed* |
|--------------|------------|------|---------------|---------|----------|-------|----------|----------|-------------|
| T8-F2-940-AB | T51113 | 4 ft | 3500lm | 25W | 140 LPW | 5000K | 80 (min) | 120-277V | Standard |

DIMENSIONS

| Order Code | A | B | C | D |
|------------|---------|---------|---------|---------|
| T51113 | 23.2 in | 23.5 in | 23.7 in | 1.02 in |

