



DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

T8 LED TUBES TYPE B SINGLE END POWER

KEY FEATURES

LEDS T8 LED Tubes Type B are the perfect solution for new construction, retrofits, and lighting upgrades, delivering high output and superior performance. Designed with top-of-the-line specifications, these tubes are available in multiple wattage and lumen output configurations, ensuring they can meet the needs of any lighting application. Ideal for a variety of commercial and industrial settings, they provide reliable and energy-efficient illumination.

CCT & Light Quality

- 3500K, 80+ CRI

Light Output

- Light Output: 1100lm - 1800lm
- Efficacy Rating: up to 150 LPW
- Life time rating 50,000 hrs.

SPECIFICATIONS

Construction

- Glass construction for superior thermal management.
- High efficacy, long life LEDs
- 240° beam angle

Electrical

- Operates at 120-277, 50/60Hz
- Power Factor: > 0.9 nominal | THD <20%
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

Warranty

5-Year Standard Warranty. See terms at: LEDS-LLC.com




Certifications & Test Data

- cULus Classified
- RoHS compliant with no lead or mercury
- DLC Standard Listed. Search qpl.designlights.org for details



T8 Single End Power

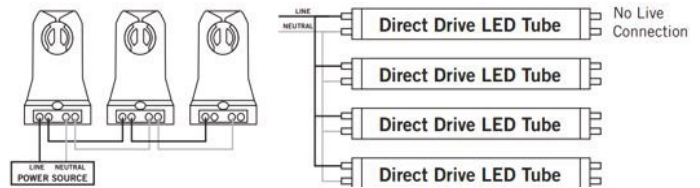


Use G13 Non-Shunted Sockets Wired to Line Voltage

STOCK ORDERING INFORMATION

Part Number	Size	Lumen Package	Wattage	Efficacy	CCT	CRI	Voltage	DLC Listed*
T8-F2-835-B	2 ft	1100lm	8W	137.5 LPW	3500K	80 (min)	120-277V	Standard
T8-F3-1035-B	3 ft	1450lm	10W	145 LPW	3500K	80 (min)	120-277V	Standard
T8-F4-1235-B	4 ft	1800lm	12W	150 LPW	3500K	80 (min)	120-277V	Standard

DIMENSIONS

Nominal Length	24 in	36 in	48 in
A (Body Length)	23.86 in	35.79 in	47.72 in
B (Diameter)	1.10 in	1.10 in	1.10 in



LEDS, LLC
email: orders@LEDS-LLC.com | LEDS-LLC.com

All specifications are subject to change without notice. All reported values are typical, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.