



DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## T8 4FT LED TUBES TYPE B SINGLE END POWER

### KEY FEATURES

LEDS T8 4' LED Tubes Type B are the perfect solution for new construction, retrofits, and lighting upgrades, delivering high output and superior performance. Designed with top-of-the-line specifications, these tubes are available in multiple wattage and lumen output configurations, ensuring they can meet the needs of any lighting application. Ideal for a variety of commercial and industrial settings, they provide reliable and energy-efficient illumination.

### CCT & Light Quality

- 4000K or 5000K, 80+ CRI

### Light Output

- Light Output: 1800lm - 3800lm
- Efficacy Rating: up to 180 LPW
- Life time rating 50,000 hrs.

### SPECIFICATIONS

#### Construction

- Glass construction for superior thermal management.
- High efficacy, long life LEDs
- 320° beam angle

#### Electrical

- Operates at 120-277, 50/60Hz
- Power Factor: > 0.9 nominal | THD <20%
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

#### Warranty

5-Year Standard Warranty. See terms at: [LEDS-LLC.com](http://LEDS-LLC.com)




### Certifications & Test Data

- cULus Classified
- RoHS compliant with no lead or mercury
- DLC Standard Listed. Search [qpl.designlights.org](http://qpl.designlights.org) for details



### T8 Single End Power

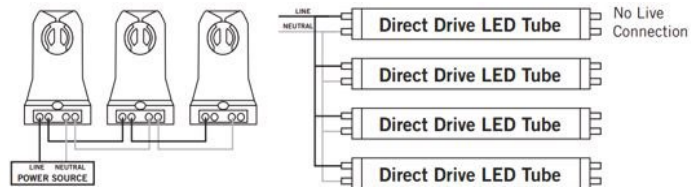

Use G13 Non-Shunted Sockets Wired to Line Voltage

### STOCK ORDERING INFORMATION


Part Number	Order Code	Size	Lumen Package	Wattage	Efficacy	CCT	CRI	Voltage	DLC Listed*
T8-F4-1040-B	T81111	4 ft	1800lm	10W	180 LPW	4000K	80 (min)	120-277V	Standard
T8-F4-1050-B	T81112	4 ft	1800lm	10W	180 LPW	5000K	80 (min)	120-277V	Standard
T8-F4-2550-B	T81117	4 ft	3800lm	25W	152 LPW	5000K	80 (min)	120-277V	Standard
T8-F4-1540-B	T81121	4 ft	1800lm	15W	120 LPW	4000K	80 (min)	120-277V	Standard
T8-F4-1550-B	T81122	4 ft	1800lm	15W	120 LPW	5000K	80 (min)	120-277V	Standard

### Dimmable

T8-F4-1240-B-D	T81125	4 ft	1800lm	12W	150 LPW	4000K	80 (min)	120-277V	Standard
----------------	--------	------	--------	-----	---------	-------	----------	----------	----------

### DIMENSIONS

Nominal Length	A (Illuminated Length)	B (Body Length)	C (Diameter)
48 in	44.70 in	47.15 in	1.00 in



LEDS, LLC  
email: [orders@LEDS-LLC.com](mailto:orders@LEDS-LLC.com) | [LEDS-LLC.com](http://LEDS-LLC.com)

All specifications are subject to change without notice. All reported values are typical, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.