



DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## T8 LED TUBES TYPE A+B SINGLE END POWER

### KEY FEATURES

The LEDS T8 Tubes are perfect for new construction, retrofit and lighting upgrade solutions. Full glass housing that prevent bending, aging and yellowing. High output and top of the line specifications. Available in multiple wattage and lumen output configurations to meet any lighting application.

#### CCT & Light Quality

- 4000K, 80+ CRI

#### Light Output

- Light Output: 1450lm - 1800lm
- Efficacy Rating: up to 161 LPW
- Life time rating 50,000 hrs.

### SPECIFICATIONS

#### Construction

- Glass construction for superior thermal management.
- High efficacy, long life LEDs
- G13 Medium Bi-Pin Base
- Lamp Type A + B

#### Electrical

- Operates at 120-277, 50/60Hz
- Power Factor: > 0.9 nominal | THD <20%
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

#### Warranty

5-Year Standard Warranty. See terms at: [LEDS-LLC.com](http://LEDS-LLC.com)



#### Certifications & Test Data

- cULus Classified
- RoHS compliant with no lead or mercury
- DLC Standard Listed. Search [qpl.designlights.org](http://qpl.designlights.org) for details




### STOCK ORDERING INFORMATION

Part Number	Order Code	Size	Lumen Package	Wattage	Efficacy	CCT	CRI	Voltage	DLC Listed*
T8-F2-940-AB	T81422	2 ft	1450lm	9W	161 LPW	4000K	80 (min)	120-277V	Standard
T8-F3-1140-AB	T81423	3 ft	1700lm	11W	154 LPW	4000K	80 (min)	120-277V	Standard
T8-F4-1240-AB	T81424	4 ft	1800lm	12W	150 LPW	4000K	80 (min)	120-277V	Standard

### DIMENSIONS

Order Code	A	B	C	D
T81422	23.2 in	23.5 in	23.7 in	1.02 in
T81423	35.2 in	35.5 in	35.7 in	1.02 in
T81424	47.2 in	47.5 in	47.7 in	1.02 in

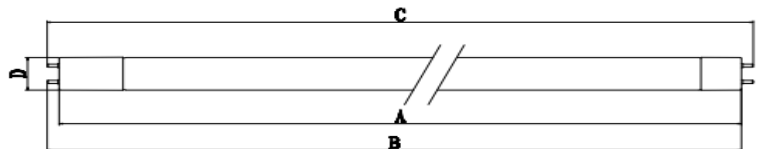

LEDS, LLC  
email: [orders@LEDS-LLC.com](mailto:orders@LEDS-LLC.com) | [LEDS-LLC.com](http://LEDS-LLC.com)

All specifications are subject to change without notice. All reported values are typical, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.