



SINGLE-END T8 LED TUBES

KEY FEATURES

LEDs LLC's single-end G13 T8 lamp offers maintenance free replacement for dated fluorescent lamps. It comes in a 4ft length, providing bright, uniform, end-to-end lighting, making it ideal for buildings with high ceilings such as warehouses, distribution centers, or department stores.

CCT & Light Quality

- 4000K, 80+ CRI

Light Output

- Light Output: 1700lm
- Efficacy Rating: up to 200 LPW
- Life time rating 50,000 hrs.

SPECIFICATIONS

Construction

- Shatter Resistant Glass Tube
- G13 Bi-Pin

Electrical

- Operates at 120-277, 50/60Hz
- Power Factor: > 0.9 nominal | THD <20%
- Operating Temperature: -20°F to 113°F (-4°C to 45°C)

Warranty

5-Year Standard Warranty. See terms at: [LEDs-LLC.com](https://www.leds-llc.com)

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	




Certifications & Test Data

- cULus Classified
- RoHS compliant with no lead or mercury
- DLC Standard Listed. Search qpl.designlights.org for details



T8 Single End Power

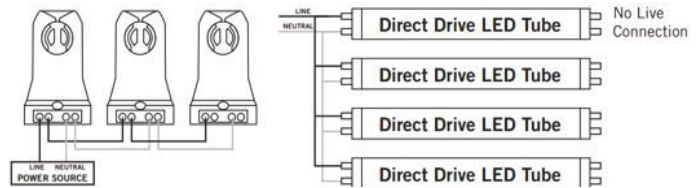


Use G13 Non-Shunted Sockets Wired to Line Voltage

STOCK ORDERING INFORMATION

Part Number	Order Code	Size	Lumen Package	Wattage	Efficacy	CCT	CRI	Voltage	DLC Listed*
T8-F4-840-B2	T81113	4 ft	1700lm	8.5W	200 LPW	4000K	80 (min)	120-277V	Standard

DIMENSIONS



Nominal Length	A (Body Length)	B (Diameter)
48 in	47.6 in	1.02 in



LEDs, LLC
email: orders@nlesinc.com | [leds-llc.com](https://www.leds-llc.com)

All specifications are subject to change without notice.
All reported values are typical, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.