

|         |          |
|---------|----------|
| DATE:   | PROJECT: |
| TYPE:   | NOTES:   |
| PART #: |          |

## 5IN & 7IN SURFACE MOUNT DISK LIGHTS WITH SELECTABLE CCT

### KEY FEATURES

#### CCT & Light Quality

- 3 Selectable CCTs (3000K/4000K/5000K)
- >90+ CRI

#### Light Output

- Wattage/Lumen Levels:  
**5"** : 650LM (10W)  
**7"** : 1000LM (15W)
- Life time rating 50,000 hrs.

#### Dimming, Controls

- Triac dimming
- Quick-Access Selectable CCT under lens

### SPECIFICATIONS

#### Construction

- 7" with Torsion Spring clips & 5" with Friction Clips Mounting
- Designed for new installs or retrofit applications
- Easy Twist Off Lens
- Frosted lens

#### Electrical

- 120V, 60Hz
- Operating temperature: -20° C (-4° F) / 45° C (113° F)

#### Warranty

5-Year Standard Warranty. See terms at: [LEDs-LLC.com](https://www.leds-llc.com)



#### Certifications & Test Data

- Built to ETL standards
- Damp Location
- RoHS compliant with no lead or mercury
- Driver rated for FCC part 15 Class B for use in residential or commercial applications




### STOCK ORDERING INFORMATION

| Order Code | Part Number      | Size | Lumen Package | Wattage | CCT                 | CRI | Voltage | Dimming |
|------------|------------------|------|---------------|---------|---------------------|-----|---------|---------|
| DS1100     | SMDS-5-3CCT-SV-D | 5"   | 650LM         | 10W     | 3000K, 4000K, 5000K | >90 | 120V    | TRIAC   |
| DS1200     | SMDS-7-3CCT-SV-D | 7"   | 1000LM        | 15W     | 3000K, 4000K, 5000K | >90 | 120V    | TRIAC   |

### DIMENSIONS

| Order Code | Size | Dimensions        |
|------------|------|-------------------|
| DS1100     | 5"   | 5.91" Dia x 0.98" |
| DS1200     | 7"   | 7.08" Dia x 0.98" |

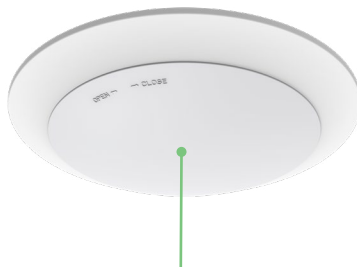

Effortlessly twist off the lens to access the built-in CCT switch, allowing for quick adjustments to color temperature.



Included in the Box:  
One 5" Disk Light  
Mounting Hardware  
Friction Clips



Included in the Box:  
One 7" Disk Light  
Mounting Hardware  
Torsion Spring Clips